


Check Valves permit flow in one direction only and close automatically when flow reverses. They are entirely automatic in action, depending upon pressure and velocity of flow within the line to perform their functions of opening and closing.

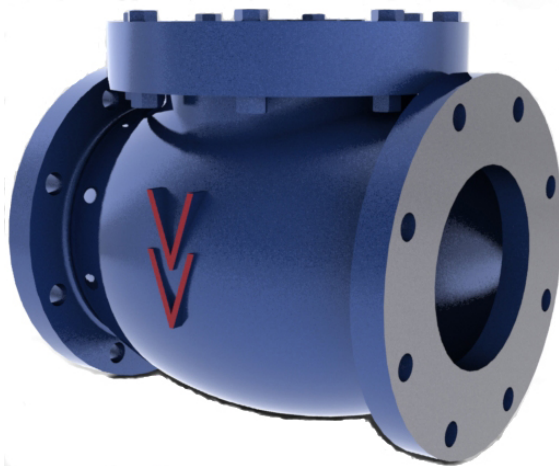

Swing Type

The disc and any associated moving parts may be in a constant state of movement if the velocity pressure is not sufficient to hold the disc in a wide open and stable position. Premature wear and noisy operation or vibration can be avoided by selecting the size of the check valve on the basis of flow conditions rather than selecting the check valve according to the size of the pipeline.

Sizing check valves on this basis may often result in the use of valves that are smaller than the pipe in which they are used, necessitating the use of reducers for installation. The pressure drop will be no greater than that of a larger valve that is partially open. Valve life will be greatly extended, and the added bonus, of course, is the lower cost of the smaller valves.

Swing Check Valves with straight through body design and wide hinge support provide turbulence-free flow and accurate seating. There is no tendency for seating surfaces to gall or score because the disc meets the flat seat squarely without rubbing. When faster reaction to flow reversal is necessary, certain valves can be equipped with an outside lever and weight. This will assist the disc to close more rapidly and reduce the possibility of surge and shock.


Flanged Swing Check Valves conform to ANSI B 16.5 Cl-125 in sizes 1" through 10".

Bronze Trim Valves are for steam, water, non-corrosive oil and gas and other fluids that do not corrode bronze.

All Iron Valves are for gases, oils and other fluids not corrosive to iron.

Swing Check Valve May be Installed in horizontal or vertical pipelines. In vertical lines, or any angle from horizontal, they can be used for upward flow only.

Class 125 • Bolted Cover • Flanged Ends

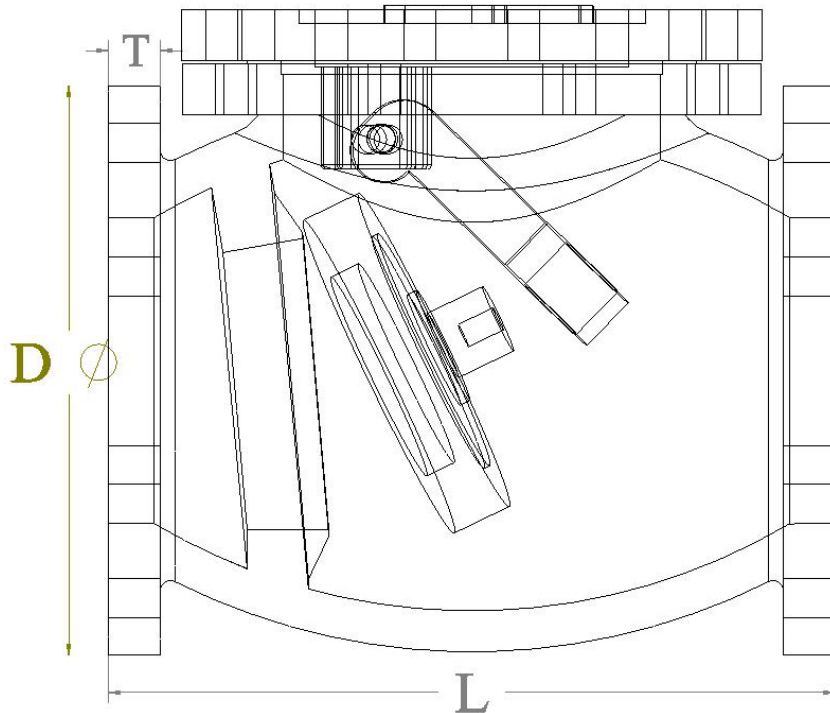

**Figure No. 345
(All Iron)**

Dimensions

Features

- Design prohibits galling or scoring of seating because the disc meets the flat seat securely on closing with no rubbing action
- M.S Hinges
- Replacable M.S Hinge Pins
- Large Bolted on cover
- Flanges as per ANSI B 16.1 CL-125
- Bolted Bonnet
- Size Range : 1" - 10"
- Packing Graphite Asbestos
- Gaskets Compressed Asbestos Fiber


Nominal Size		L		D (Dia.)		H Appx.	T (Thickness)	
inch.	mm	inch.	mm	inch.	mm	mm	inch	mm
1	25	5 ¼	135	4 ¼	110	90	7/16	13
1 ¼	32	6 3/8	162	4 5/8	122	100	½	17
1 ½	40	6 ½	165	5	127	100	9/16	14.3
2	50	8	203	6	152	105	5/8	15.9
2 ½	65	8 ½	216	7	178	115	11/16	17.5
3	80	9 ½	241	7 ½	190	130	¾	19.0
4	100	11 ½	292	9	229	150	15/16	23.8
5	125	13	330	10	254	185	15/16	23.8
6	150	14	356	11	279	195	1	25.4
8	200	19 ½	495	13 ½	343	230	1 1/8	28.6
10	250	24 ½	622	16	406	300	1 3/16	30.2

Figure No. 347/346


S.S Trim/ G.M Trim

V V[®]


Class 125 • Bolted Cover • Flanged Ends

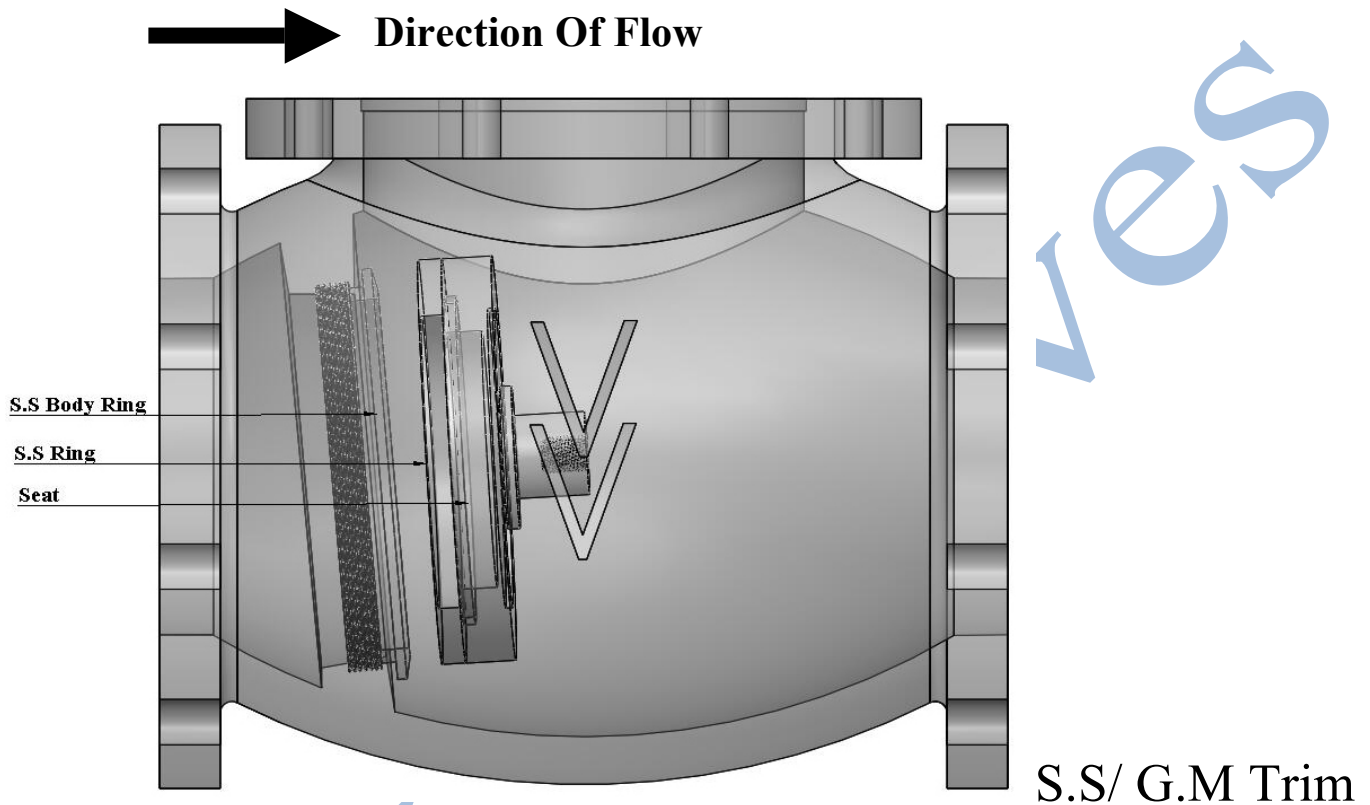

Renewable PTFE Disc/
Rubber Disc

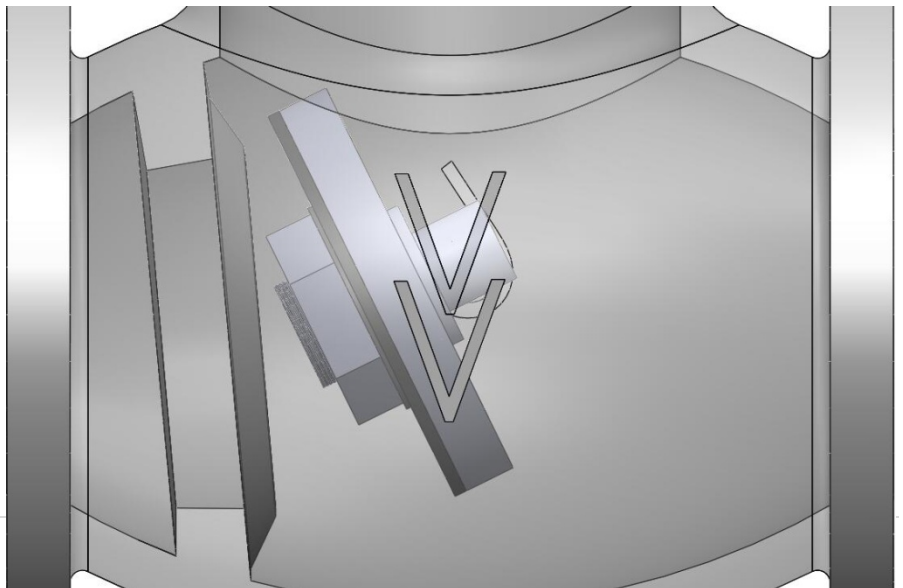

Orientation of swing check valve

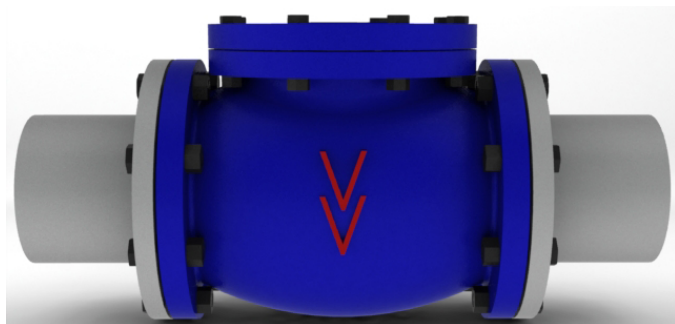

Horizontal Line



Vertical Line

Address:

V.V. Valves Industrial Corporation.

25, Industrial Development
Colony, Jalandhar Road,
Hoshiarpur.(Pb.)-146001.

Contact Person: Er. K.S Rana

Er. Arjun Rana

Phone : 01882-252-207

Fax: 500-289

E-Mail : info@vvvalves.in

Visit Us At : www.vvvalves.in

NOTES