



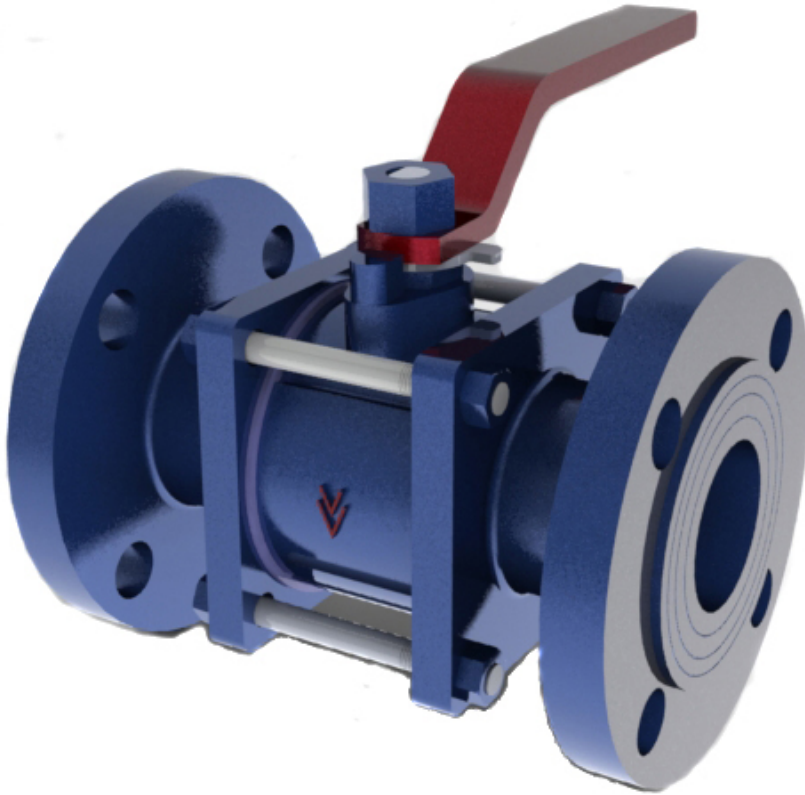


Features

- Three piece valve itself act as union. The parts which might require servicing can be removed from the valve without disturbing the end connections
- Mirror finish smooth ball
- Full Bore (Excellent flow)
- Quarter turn shut off, blow out proof stem
- No lubrication and maintenance required
- Suitable for temperature upto **170⁰ C**
- Suitable for **oil, water, air, gas, steam and chemicals**
- Size Range : 15 mm – 150 mm

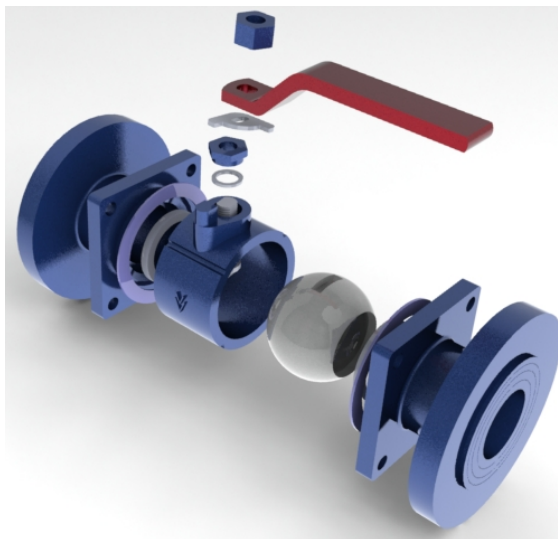

Exploded View

SECTIONAL VIEW

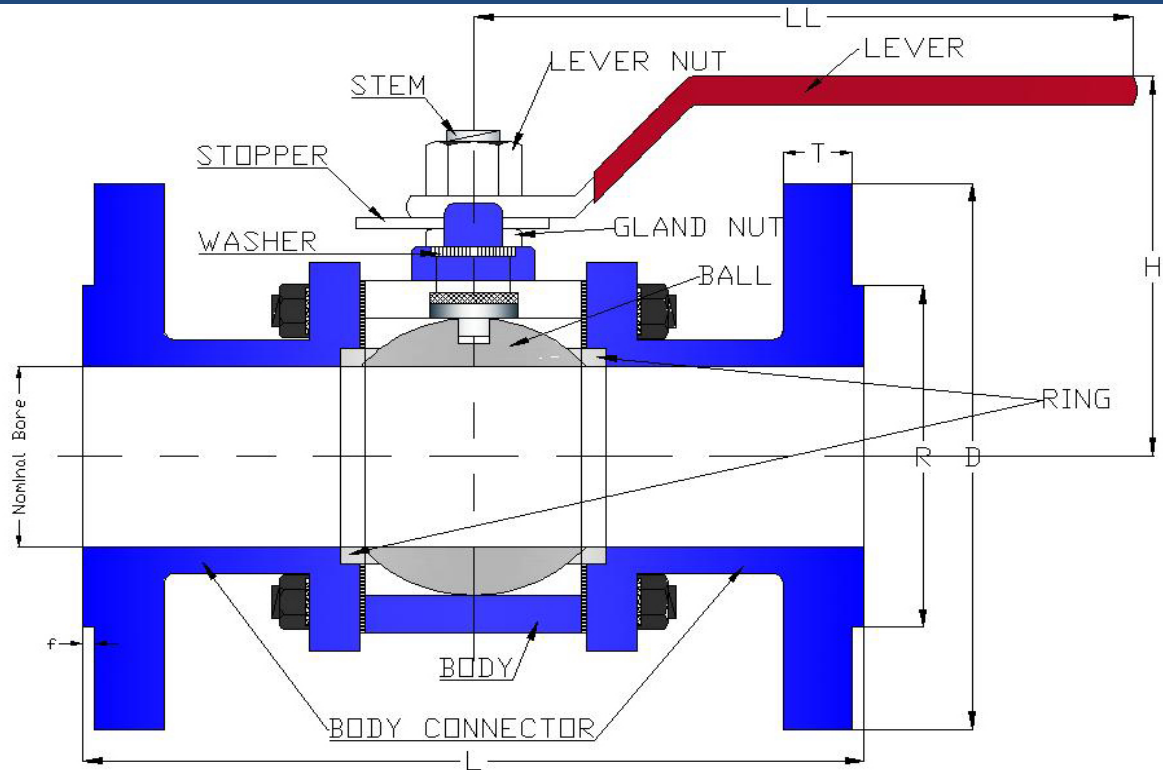

Dimensions

Nominal Size	L	D (Dia.)	H (Appx.)	T (Thickness) min.	LL (Appx.)	R	f
mm	mm	mm	mm	mm	mm	mm	mm
15	130	95	60	14.3	135	45	2
20	130	100	66	15.9	155	50	2
25	140	108	68	17.5	155	60	2
32	165	117	105	19.1	165	63	2
40	165	127	105	20.6	190	73	3
50	203	152	120	22.2	190	92	3
65	222	177	127	25.4	285	104	3
80	241	190	140	28.6	285	127	3
100	305	228	152	31.8	325	157	3
125	368	254	220	36.5	610	185	3
150	394	279	224	36.5	610	215	3

Address:

V.V. Valves Industrial Corporation.
25, Industrial Development
Colony, Jalandhar Road,
Hoshiarpur.(Pb.)-146001.

Contact Person: Er. K.S Rana
Er. Arjun Rana
Phone : 01882-252-207
Fax: 500-289
E-Mail : info@vvvalves.in

NOTES