

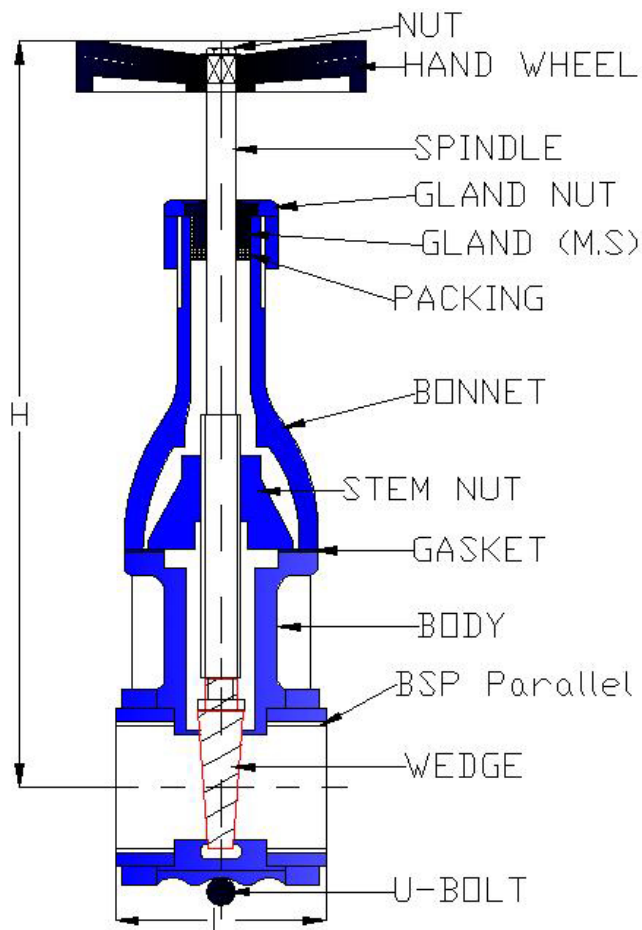


Fig. No. 1011

Features

- Compact Design
- Easy Maintenance
- M.S U-Bolt Clamp
- **Anti Clogging Bonnet**
- Integral Seats
- Stem Provided with ACME Double Start
- Packing Graphited Asbestos
- Gaskets Compressed Asbestos Fibre
- Size Range 1 ½" - 4"
- Seating : Iron
- Stem : M.S/ S.S AISI 410
- **Every Valve is individually tested**
- Screwed Female Ends BSP Parallel
- **Long Pipe Threads at ends extending deep into the body to assure a pressure tight connection without damage to the valve seats.**

Dimensions

Nominal Size		Face To Face L		Height H (Closed) Appx.
inch	mm	inch	mm	mm
1 ½"	40	3" 1/8	81	287
2"	50	3" 5/8	92	330
2 ½"	65	5" 1/8	130	345
3"	80	5" 5/16	136	400
4"	100	6" 5/16	159	435

Address:

25, Industrial Development
Colony, Jalandhar Road,
Hoshiarpur.(Pb.)-146001.

Contact Person: Er. K.S Rana

Er. Arjun Rana

Phone : 252-207

Fax: 500-289

E-Mail : info@vvvalves.in

Visit Us At : www.vvvalves.in

NOTES

This image shows a full page of blank handwriting practice paper. It features multiple sets of horizontal lines spaced evenly down the page. Each set typically consists of three lines: a solid top line, a dashed middle line, and a solid bottom line, providing a guide for letter height and placement. The paper is otherwise completely blank, with no text or other markings.