


Inside Screw • Non Rising Stem

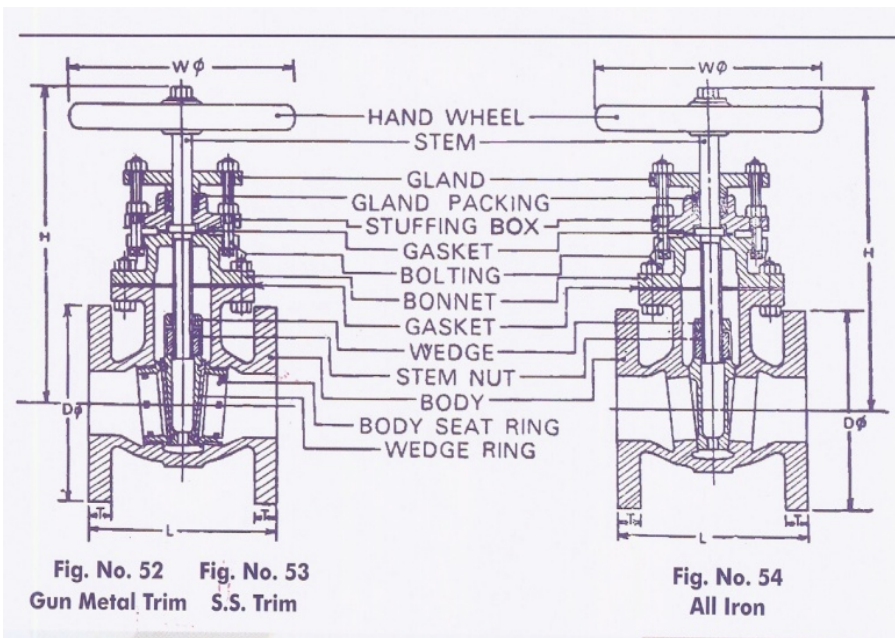

These Flanges can be drilled to ASA CL-150 except 2 ½" & 4"

Features

- Tapered Solid Wedge Disc
- Integral Seats
- Stem Provided with ACME Double Start
- Packing Graphited Asbestos
- Gaskets Compressed Asbestos Fibre
- Size Range 1 ½" - 10"
- Seating : Iron/Renewable G.M Seat Rings/ Renewable S.S Seat Rings
- Stem : M.S/ S.S AISI 410/ Extruded Brass Rod
- Every Valve is individually tested
- Flanges as per B.S 10 Table 'D' / Table 'E'

Dimensions

Nominal Size		L		D (Dia.)		H (Open) Appx.	T (Thickness)	
inch.	mm	inch.	mm	inch.	mm	mm	inch	mm
1 ¼	32	5 5/8	143	5 ¼	133	215	5/8	16
1 ½	40	5 5/8	143	5 ¼	133	215	5/8	16
2	50	6	152	6	152	245	11/16	17.5
2 ½"	65	6 ¼	159	6 ½	165	270	11/16	17.5
3	80	6 ¾	172	7 ¼	184	300	¾	19
4	100	7 ¼	184	8 ½	216	375	¾	19
5	125	7 ¾	197	10	254	420	¾	20.5
6	150	8	203	11	279	480	¾	20.5
7	175	8 ¾	222	10	305	575	7/8	22
8	200	9 ¼	235	13 ½	337	635	7/8	22
10	250	13	330	16	406	725	1	25.5

Address:

V.V. Valves Industrial Corporation.

25, Industrial Development
Colony, Jalandhar Road,
Hoshiarpur.(Pb.)-146001.

Contact Person: Er. K.S Rana

Er. Arjun Rana

Phone : 01882-252-207

Fax: 500-289

E-Mail : info@vvvalves.in

Visit Us At : www.vvvalves.in

NOTES